

CONSTRUCTION-CLASS EXCAVATORS

ZAXIS

DASH-6

ZX350LC-6
ZX380LC-6



HITACHI

BY NOT BUILDING EVERYTHING, WE COMPROMISE ON NOTHING.

EXCAVATOR FOCUSED. NO DISTRACTIONS.

At Hitachi, we don't get sidetracked building every kind of construction equipment. Instead, we build excavators. It's that kind of focus, combined with our legacy of innovative technology, that results in highly efficient, reliable and durable machines — the ZX350LC-6 and ZX380LC-6 are no exceptions.

Hitachi Dash-6 Excavators are purpose-built with productivity-boosting advantages. Front and center is a new, fuel-efficient EPA Final Tier 4 (FT4)/EU Stage IV Isuzu engine that meets rigid emission standards – no diesel particulate filter needed. Generous swing torque, digging force and lift capacity. Spacious cabs designed for operator comfort and productivity. Standard upperstructure handrails for added safety and accessibility. Easy-to-operate controls for smooth and responsive hydraulics. Highly efficient cooling systems. And simplified daily and periodic maintenance thanks to features like single-side ground-level filters and a battery disconnect switch. Add it all up, and you get excavators that keep your jobs...

MOVING AHEAD, NEVER BEHIND.





SPECIALISTS

ZX350LC-6 / ZX380LC-6

ZAXIS | DASH-6 CONSTRUCTION-CLASS EXCAVATORS

PRODUCTIVITY





GET MORE DONE **WITH LESS EFFORT.**

WORK ANYWHERE, ANYTIME.

When it comes to smooth responsiveness and multifunction capability, Dash-6 Excavators don't disappoint. Our HIOS III hydraulic system perfectly balances engine performance with hydraulic flow. The hydraulic boost system and enhanced boom recirculation generate aggressive boom and arm speed — returning the arm to dig faster, so you can move more dirt in a day.

The ZX350LC-6 and ZX380LC-6 provide power and finesse for big productivity on any job. Take your pick of three work modes to fit the task. High Productivity (H/P) delivers more power and faster hydraulic response. Power (PWR) delivers a balance of power and speed, plus fuel economy for normal operation. Economy (ECO) maximizes fuel efficiency while delivering an enhanced level of productivity.

Need extra stability or lift capacity? Choose from a wide variety of track widths, arm lengths, bucket sizes and teeth, high-flow auxiliary hydraulic packages and other options.

BIG PRODUCTIVITY, BIG PERFORMANCE.

■ The pressurized fuel system improves fuel injector operation, and the fuel recirculation system helps prevent fuel gelling in cold climates — so you can maintain maximum productivity.

■ It's not always about brute force. Unmatched metering and smooth multifunction operation provide plenty of finesse and precision, too.

■ Stay on schedule with generous swing torque, digging force and lift capacity.

■ Muscle through tough digging by pressing the power-boost button.

A COMFORTABLE OPERATOR IS A MORE PRODUCTIVE OPERATOR.

COMFORTABLE, SAFE AND PRODUCTIVE CABS.

With our spacious, well-appointed cabs, operators are more comfortable. And comfortable operators are more efficient and productive. Silicone-filled cab mounts provide isolation from noise and vibration. A refined, multifunction LCD monitor employs a rotary control that makes it quick and simple to tap into a wealth of performance and convenience functions and features. Operators will also appreciate the wide entryway, fully adjustable high-back sculpted seat, lots of storage and generous legroom. As always, unsurpassed visibility, ergonomically placed low-effort joysticks, a highly efficient HVAC system, plus other features give your operators...

MORE COMFORT, MORE PRODUCTIVITY.



■ Multi-language LCD monitor and rotary dial provide intuitive access to machine info and functions. Just turn and tap to select work modes, monitor maintenance intervals, check diagnostic codes and set cab temperature. Control oil flow and toggle between dig and thumb modes with a programmable thumb-attachment mode.



■ Ergonomically correct short-throw pilot levers provide smooth, precise control with less effort. Pushbuttons in the right lever allow control of auxiliary hydraulic flow for attachments. Optional sliding switch provides proportional speed control, giving you full command from your fingertips.



■ Get unobstructed all-around visibility thanks to a new hood design paired with a wide expanse of front, side, and overhead glass and mirrors.



■ Whatever your grade system, Topcon, Trimble or Leica, Hitachi offers a grade reference ready package that reduces installation time by half.

■ Operators get maximum support from a sculpted mechanical-suspension high-back seat. Seat has 318 mm (12.5 in.) of travel, sliding together or independent of the joystick console. For even more comfort, opt for the air-suspension heated seat.

■ Optional cab and right-side boom lights provide extra illumination to extend your production.

■ Automatic, high-velocity bi-level climate-control system with automotive-style adjustable louvers helps keep the glass clear, the cab comfortable and the operator productive.

DURABILITY



■ Our field-proven technology is simple and efficient, employing cooled exhaust gas recirculation (EGR), a diesel oxidation catalyst (DOC) and selective catalytic reduction (SCR). An improved piston design allows particulate matter to be burned in cylinder, so there's no need for a diesel particulate filter (DPF).

■ Reinforced D-channel side frames provide maximum cab and component impact protection.

■ Tungsten-carbide coated wear surfaces protect the critical bucket-to-arm joint.

■ Oil-impregnated bushings enhance durability and extend lube intervals to 500 hours for the arm-and-boom joint and 100 hours for the bucket joint.

■ With large idlers, rollers and strutted track links, the sealed and lubricated undercarriage is built for the long haul.

DURABILITY BUILT-IN. DOWNTIME TOSSED OUT.

TOUGHNESS YOU CAN COUNT ON.

When you've got places to go and deadlines to meet, you want reliable equipment like the ZX350LC-6 and ZX380LC-6. Built to deliver dependable performance, they're armed with everything you need — and more. D-channel side frames house and protect the highly efficient coolers and FT4/Stage IV Isuzu diesel engines. Toughness is built into the heavy-duty undercarriage, digging structures, and hydraulic and electrical components. Added strength comes from welded bulkheads within the boom that resist torsional stress, tungsten-carbide thermal-coated arm surfaces and oil-impregnated bushings. Booms, arms and mainframes are so tough, they're warranted for three years or 10,000 hours, whichever comes first. Add it all up and our Dash-6 Excavators give you...

BIG-TIME UPTIME.

■ Thick-plate single-sheet mainframe, box-section track frames and industry-exclusive double-seal swing bearing deliver rock-solid durability.



EASY MAINTENANCE FOR MORE PRODUCTIVITY.

LOWER OPERATING COSTS.

From the convenient handrails that provide easy engine access to the grouped service points — the ZX350LC-6 and ZX380LC-6 are loaded with time- and money- saving advantages. Productivity is maximized with 500- and 5,000-hour engine and hydraulic oil-service intervals. And easy-to-check sight gauges and fluid reservoirs, quick-change remote-mounted filters, and convenient fluid-sample ports minimize downtime for periodic maintenance. Scheduled maintenance is easy to track using ZXLink™ and the in-cab diagnostic monitor. Pair these features with a dealer-customized Ultimate Uptime package, and you get...

LESS MAINTENANCE, MORE UPTIME.



■ Easy-to-navigate LCD monitor issues scheduled maintenance alerts and diagnostic information. Additionally, the hydraulic temperature gauge on the monitor screen helps prevent downtime.



■ Centralized lube banks place engine oil, fuel and hydraulic pilot oil filters are all located on the same side at ground level for easy servicing.



■ Engine oil, fuel and hydraulic pilot oil filters are all located on the same side at ground level for easy servicing.





■ Upperstructure handrails provide added safety when servicing the engine compartment, and a larger hood gives you better engine accessibility.

■ Auto-idle, which reduces engine speed when hydraulics aren't in use, and auto-shutdown contribute to fuel efficiency.

■ A battery disconnect switch, located in the rear door behind the cab, is easily accessible and extends battery life.

■ The FT4 engine solution does not require a diesel particulate filter (DPF), saving service time and lowering operating costs.

ZX350LC-6

| | | | |
|---|--|---------------------|--------------------|
| Engine | ZX350LC-6 | | |
| Manufacturer and Model | Isuzu 6HK1 | | |
| Non-Road Emission Standard | EPA Final Tier 4 / EU Stage IV | | |
| Net Rated Power (ISO 9249) | 202 kW (271 hp) at 1,900 rpm | | |
| Cylinders | 6 | | |
| Displacement | 7.8 L (475 cu. in.) | | |
| Off-Level Capacity | 70% (35 deg.) | | |
| Aspiration | Turbocharged, air-to-air charge-air cooler | | |
| Cooling | High efficiency direct-driven, suction-type fan and cool-on-demand hydraulic-driven, suction-type fan with remote-mounted drive for hydraulic oil cooler | | |
| Powertrain | 2-speed propel with automatic shift | | |
| Maximum Travel Speed | | | |
| Low | 3.2 km/h (2.0 mph) | | |
| High | 5.0 km/h (3.1 mph) | | |
| Drawbar Pull | 30 350 kg (66,900 lb.) | | |
| Hydraulics | Open center, load sensing | | |
| Main Pumps | 2 variable-displacement pumps | | |
| Maximum Rated Flow | 288 L/m (76.1 gpm) x 2 | | |
| System Operating Pressure | | | |
| Circuits | | | |
| Implement | 34 300 kPa (4,975 psi) | | |
| Travel | 35 500 kPa (5,149 psi) | | |
| Swing | 33 300 kPa (4,830 psi) | | |
| Power Boost | 38 000 kPa (5,511 psi) | | |
| Controls | Pilot levers, short-stroke, low-effort hydraulic pilot controls with shutoff lever | | |
| Cylinders | Heat-treated, chrome-plated, polished cylinder rods, hardened steel (replaceable bushings) pivot pins | | |
| | Bore | Rod Diameter | Stroke |
| Boom (2) | 145 mm (5.7 in.) | 100 mm (3.9 in.) | 1520 mm (59.8 in.) |
| Arm (1) | 170 mm (6.7 in.) | 115 mm (4.5 in.) | 1740 mm (68.5 in.) |
| Bucket (1) | 140 mm (5.5 in.) | 95 mm (3.7 in.) | 1250 mm (49.2 in.) |
| Mass-Excavating (ME) Bucket (1) | 145 mm (5.7 in.) | 95 mm (3.7 in.) | 1250 mm (49.2 in.) |
| Electrical | Number of Batteries (12 volt) 2 | | |
| Battery Capacity | 1,000 CCA | | |
| Alternator Rating | 50 amp | | |
| Work Lights | 2 halogen (one mounted on boom, one on frame) | | |
| Undercarriage | Rollers (each side) | | |
| Carrier | 2 | | |
| Track | 8 | | |
| Shoes, Triple Semi-Grousers (each side) | 48 | | |
| Track | Adjustment Hydraulic | | |
| Guides | 3 per side | | |
| Chain | Sealed and lubricated | | |
| Ground Pressure | 800-mm (32 in.) Triple Semi-Grouser Shoes 49.3 kPa (7.15 psi) | | |
| Swing Mechanism | Speed 10.7 rpm | | |
| Torque | 120 000 Nm (88,500 lb.-ft.) | | |

SPECS

Serviceability ZX350LC-6

Refill Capacities

| | |
|---------------------------------|-------------------|
| Fuel Tank | 630 L (166 gal.) |
| Diesel Exhaust Fluid (DEF) Tank | 70 L (18 gal.) |
| Cooling System | 45 L (12 gal.) |
| Engine Oil with Filter | 48 L (13 gal.) |
| Hydraulic Tank | 180 L (48 gal.) |
| Hydraulic System | 340 L (90 gal.) |
| Swing Drive | 15.7 L (16.6 qt.) |
| Gearbox | |
| Propel (each) | 9.2 L (9.7 qt.) |
| Pump Drive | 1.1 L (1.2 qt.) |


Operating Weights

With full fuel tank; 79-kg (175 lb.) operator; 1.4-m³ (1.8 cu. yd.), 1370-mm (54 in.), 1160-kg (2,557 lb.) bucket; 4.0-m (13 ft. 1 in.) arm; 6900-kg (15,212 lb.) counterweight; and 800-mm (32 in.) triple semi-grouser shoes

Operating Weight 35 090 kg (77,360 lb.)

Component Weights


| | |
|--|------------------------|
| Undercarriage w/ Triple Semi-Grouser Shoes | |
| 800-mm (32 in.) | 12 710 kg (28,021 lb.) |
| One-Piece Boom (with arm cylinder) | |
| 6.4 m (21 ft. 0 in.) | 3246 kg (7,156 lb.) |
| 5.7 m (18 ft. 8 in.) ME | 3173 kg (6,995 lb.) |
| Arm with Bucket Cylinder and Linkage | |
| 2.10 m (6 ft. 10 in.) ME | 1830 kg (4,034 lb.) |
| 2.67 m (8 ft. 9 in.) Heavy-Duty (HD) | 1904 kg (4,198 lb.) |
| 3.20 m (10 ft. 6 in.) | 1811 kg (3,993 lb.) |
| 4.00 m (13 ft. 1 in.) | 1935 kg (4,266 lb.) |
| Boom Lift Cylinders (2), Total Weight | 290 kg (639 lb.) |

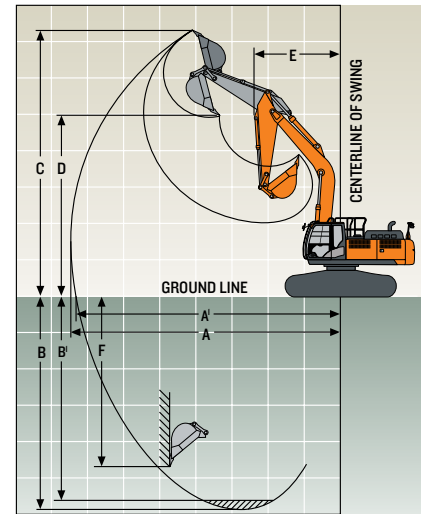

Operating Dimensions

| | | | | | |
|--|------------------------|-----------------------|------------------------|------------------------|-------------------------|
| Arm Length | 2.1 m (6 ft. 10 in.) | 2.67 m (8 ft. 9 in.) | 2.67 m (8 ft. 9 in.) | 3.2 m (10 ft. 6 in.) | 4.0 m (13 ft. 1 in.) |
| Boom Length | 5.7 m (18 ft. 8 in.) | 5.7 m (18 ft. 8 in.) | 6.4 m (21 ft. 0 in.) | 6.4 m (21 ft. 0 in.) | 6.4 m (21 ft. 0 in.) |
| Arm Digging Force | | | | | |
| SAE | 275 kN (61,822 lb.) | 213 kN (47,884 lb.) | 213 kN (47,884 lb.) | 177 kN (39,791 lb.) | 153 kN (34,396 lb.) |
| ISO | 288 kN (64,745 lb.) | 222 kN (49,908 lb.) | 222 kN (49,908 lb.) | 185 kN (41,590 lb.) | 159 kN (35,745 lb.) |
| Bucket Digging Force | | | | | |
| SAE | 229 kN (51,481 lb.) | 214 kN (48,109 lb.) | 214 kN (48,109 lb.) | 214 kN (48,109 lb.) | 214 kN (48,109 lb.) |
| ISO | 264 kN (59,350 lb.) | 246 kN (55,303 lb.) | 246 kN (55,303 lb.) | 246 kN (55,303 lb.) | 246 kN (55,303 lb.) |
| A Maximum Reach | 9.41 m (30 ft. 10 in.) | 9.93 m (32 ft. 7 in.) | 10.57 m (34 ft. 8 in.) | 11.10 m (36 ft. 5 in.) | 11.86 m (38 ft. 11 in.) |
| A' Maximum Reach at Ground Level | 9.16 m (30 ft. 1 in.) | 9.69 m (31 ft. 9 in.) | 10.36 m (34 ft. 0 in.) | 10.89 m (35 ft. 9 in.) | 11.67 m (38 ft. 3 in.) |
| B Maximum Digging Depth | 5.62 m (18 ft. 5 in.) | 6.22 m (20 ft. 5 in.) | 6.84 m (22 ft. 5 in.) | 7.38 m (24 ft. 3 in.) | 8.18 m (26 ft. 10 in.) |
| B' Maximum Digging Depth at 2.44-m (8 ft.) Flat Bottom | 5.39 m (17 ft. 8 in.) | 6.02 m (19 ft. 9 in.) | 6.64 m (21 ft. 9 in.) | 7.21 m (23 ft. 8 in.) | 8.04 m (26 ft. 5 in.) |
| C Maximum Cutting Height | 9.43 m (30 ft. 11 in.) | 9.66 m (31 ft. 8 in.) | 9.99 m (32 ft. 9 in.) | 10.36 m (34 ft. 0 in.) | 10.75 m (35 ft. 3 in.) |
| D Maximum Dumping Height | 6.39 m (20 ft. 12 in.) | 6.60 m (21 ft. 8 in.) | 6.94 m (22 ft. 9 in.) | 7.24 m (23 ft. 9 in.) | 7.63 m (25 ft. 0 in.) |
| E Minimum Swing Radius | 4.04 m (13 ft. 3 in.) | 4.05 m (13 ft. 3 in.) | 4.61 m (15 ft. 1 in.) | 4.46 m (14 ft. 8 in.) | 4.47 m (14 ft. 8 in.) |
| F Maximum Vertical Wall | 4.15 m (13 ft. 7 in.) | 4.78 m (15 ft. 8 in.) | 5.51 m (18 ft. 1 in.) | 6.42 m (21 ft. 1 in.) | 7.27 m (23 ft. 10 in.) |

| Machine Dimensions | ZX350LC-6 |
|--|---|
| A Overall Length | |
| 2.1-m (6 ft. 10 in.) ME arm / 5.7-m (18 ft. 8 in.) ME boom | 10.99 m (36 ft. 1 in.) |
| 2.67-m (8 ft. 9 in.) HD arm / 5.7-m (18 ft. 8 in.) ME boom | 11.34 m (37 ft. 2 in.) |
| 2.67-m (8 ft. 9 in.) HD arm / 6.4-m (21 ft. 0 in.) boom | 11.33 m (37 ft. 2 in.) |
| 3.2-m (10 ft. 6 in.) arm / 6.4-m (21 ft. 0 in.) boom | 11.20 m (36 ft. 9 in.) |
| 4.0-m (13 ft. 1 in.) arm / 6.4-m (21 ft. 0 in.) boom | 11.29 m (37 ft. 0 in.) |
| B Overall Height | |
| 2.1-m (6 ft. 10 in.) ME arm / 5.7-m (18 ft. 8 in.) ME boom | 4.04 m (13 ft. 3 in.) |
| 2.67-m (8 ft. 9 in.) HD arm / 5.7-m (18 ft. 8 in.) ME boom | 3.47 m (11 ft. 5 in.) |
| 2.67-m (8 ft. 9 in.) HD arm / 6.4-m (21 ft. 0 in.) boom | 3.47 m (11 ft. 5 in.) |
| 3.2-m (10 ft. 6 in.) arm / 6.4-m (21 ft. 0 in.) boom | 3.27 m (10 ft. 9 in.) |
| 4.0-m (13 ft. 1 in.) arm / 6.4-m (21 ft. 0 in.) boom | 3.60 m (11 ft. 10 in.) |
| C Swing Radius | 3.60 m (11 ft. 10 in.) |
| D Distance Between Idler/Sprocket Centerline | 4.05 m (13 ft. 3 in.) |
| E Undercarriage Length | 4.94 m (16 ft. 2 in.) |
| F Counterweight Clearance | 1.18 m (3 ft. 10 in.) |
| G Upperstructure Width | 2.99 m (9 ft. 10 in.) |
| H Cab Height | 3.14 m (10 ft. 4 in.) |
| I Track Width with Triple Semi-Grouser Shoes | 600 mm (24 in.) / 700 mm (28 in.) / 800 mm (32 in.) |
| J Gauge Width | 2.59 m (8 ft. 6 in.) |
| K Ground Clearance | 0.51 m (20 in.) |
| L Overall Width with Triple Semi-Grouser Shoes | |
| 600 mm (24 in.) | 3.19 m (10 ft. 6 in.) |
| 700 mm (28 in.) | 3.29 m (10 ft. 10 in.) |
| 800 mm (32 in.) | 3.39 m (11 ft. 2 in.) |

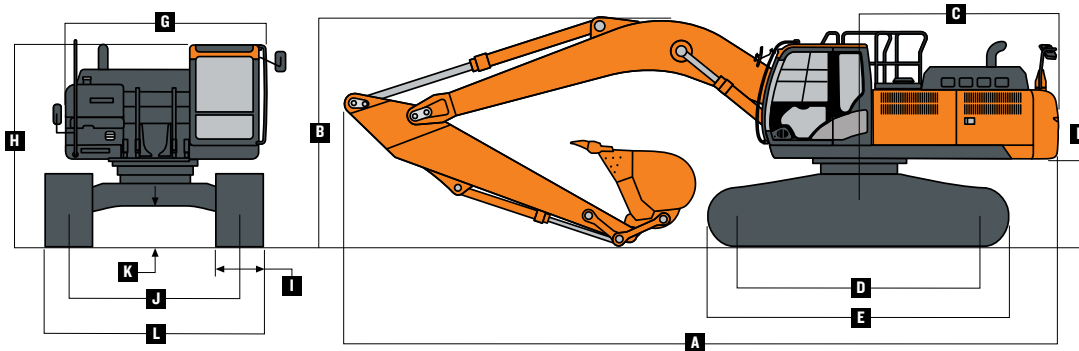

SPECS

Lift Charts ZX350LC-6

Boldface type indicates hydraulically limited capacity; **lightface type** indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Machine equipped with 800-mm (32 in.) shoes; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.

| Load Point Height | 1.5 m (5 ft.) | | 3.0 m (10 ft.) | | 4.5 m (15 ft.) | | 6.0 m (20 ft.) | | 7.5 m (25 ft.) | | 9.0 m (30 ft.) | |
|--|---------------|-----------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------|-----------------|-----------|----------------|-----------|
| Horizontal Distance from Centerline of Rotation | Over Front | Over Side | Over Front | Over Side | Over Front | Over Side | Over Front | Over Side | Over Front | Over Side | Over Front | Over Side |
| With 2.1-m (6 ft. 10 in.) ME arm, 5.7-m (18 ft. 8 in.) ME boom and 1273-kg (2806 lb.) bucket | | | | | | | | | | | | |
| 6.0 m (20 ft.) | | | | | | | 10 900 | 8750 | | | | |
| | | | | | | | (23,900) | (18,800) | | | | |
| 4.5 m (15 ft.) | | | | | 15 050 | 13 550 | 11 800 | 8400 | | | | |
| | | | | | (32,350) | (29,200) | (25,650) | (18,050) | | | | |
| 3.0 m (10 ft.) | | | | | | | 13 100 | 7950 | 9200 | 5500 | | |
| | | | | | | | (28,350) | (17,100) | (19,800) | (11,750) | | |
| 1.5 m (5 ft.) | | | | | | | 13 050 | 7550 | 9050 | 5300 | | |
| | | | | | | | (28,000) | (16,250) | (19,400) | (11,450) | | |
| Ground Line | | | | | 19 350 | 11 550 | 12 800 | 7350 | | | | |
| | | | | | (41,950) | (24,800) | (27,500) | (15,850) | | | | |
| -1.5 m (-5 ft.) | | | | | 17 600 | 11 600 | 12 800 | 7350 | | | | |
| | | | (48,100) | (48,100) | (38,150) | (24,950) | (27,550) | (15,900) | | | | |
| -3.0 m (-10 ft.) | | | 17 750 | 17 750 | 14 050 | 11 950 | | | | | | |
| | | | (38,500) | (38,500) | (30,150) | (25,700) | | | | | | |
| With 2.67-m (8 ft. 9 in.) HD arm, 5.7-m (18 ft. 8 in.) ME boom and 1273-kg (2,806 lb.) bucket | | | | | | | | | | | | |
| 6.0 m (20 ft.) | | | | | | | 9950 | 9000 | | | | |
| | | | | | | | (21,800) | (19,250) | | | | |
| 4.5 m (15 ft.) | | | | | 13 700 | 13 700 | 11 050 | 8600 | 9550 | 5800 | | |
| | | | | | (29,550) | (29,550) | (23,950) | (18,500) | (20,500) | (12,400) | | |
| 3.0 m (10 ft.) | | | | | 17 000 | 12 850 | 12 500 | 8100 | 9350 | 5600 | | |
| | | | | | (36,550) | (27,700) | (27,050) | (17,500) | (20,050) | (11,950) | | |
| 1.5 m (5 ft.) | | | | | 19 250 | 12 000 | 13 200 | 7700 | 9100 | 5350 | | |
| | | | | | (41,550) | (25,850) | (28,350) | (16,550) | (19,550) | (11,550) | | |
| Ground Line | | | | | 19 650 | 11 650 | 12 900 | 7400 | 8950 | 5250 | | |
| | | | | | (42,600) | (25,050) | (27,700) | (15,950) | (19,250) | (11,250) | | |
| -1.5 m (-5 ft.) | | | 19 100 | 19 100 | 18 500 | 11 650 | 12 800 | 7350 | | | | |
| | | | (43,400) | (43,400) | (40,100) | (25,000) | (27,500) | (15,850) | | | | |
| -3.0 m (-10 ft.) | | | 21 100 | 21 100 | 15 700 | 11 850 | 11 400 | 7500 | | | | |
| | | | (45,750) | (45,750) | (33,900) | (25,450) | (24,200) | (16,200) | | | | |
| -4.5 m (-15 ft.) | | | | | 9700 | 9700 | | | | | | |
| With 2.67-m (8 ft. 9 in.) HD arm, 6.4-m (21 ft. 0 in.) boom and 1273-kg (2,806 lb.) bucket | | | | | | | | | | | | |
| 6.0 m (20 ft.) | | | | | | | 9370 | 9370 | 8640 | 6340 | | |
| | | | | | | | (20,380) | (20,220) | (18,970) | (13,590) | | |
| 4.5 m (15 ft.) | | | | | 13 990 | 13 990 | 10 730 | 8950 | 9170 | 6150 | | |
| | | | | | (29,980) | (29,980) | (23,210) | (19,280) | (19,960) | (13,220) | | |
| 3.0 m (10 ft.) | | | | | 17 510 | 13 040 | 12 340 | 8430 | 9750 | 5900 | | |
| | | | | | (37,570) | (28,140) | (26,640) | (18,160) | (20,950) | (12,690) | | |
| 1.5 m (5 ft.) | | | | | | | 13 610 | 8000 | 9490 | 5670 | | |
| | | | | | (37,770) | (26,560) | (29,310) | (17,240) | (20,410) | (12,200) | | |
| Ground Line | | | | | 19 190 | 12 130 | 13 360 | 7770 | 9330 | 5520 | | |
| | | | | | (42,350) | (26,070) | (28,700) | (16,720) | (20,050) | (11,880) | | |
| -1.5 m (-5 ft.) | | | 12 790 | 12 790 | 18 520 | 12 160 | 13 290 | 7710 | 9290 | 5490 | | |
| | | | (29,200) | (29,200) | (40,190) | (26,120) | (28,550) | (16,590) | (19,990) | (11,820) | | |
| -3.0 m (-10 ft.) | | | 21 520 | 21 520 | 16 430 | 12 350 | 12 430 | 7820 | | | | |
| | | | (46,790) | (46,790) | (35,560) | (26,550) | (26,770) | (16,840) | | | | |
| -4.5 m (-15 ft.) | | | 16 160 | 16 160 | 12 550 | 12 550 | | | | | | |
| | | | (34,620) | (34,620) | (26,720) | (26,720) | | | | | | |

ZX350LC-6 SPECS

ZAXIS | DASH-6 CONSTRUCTION-CLASS EXCAVATORS

Lift Charts ZX350LC-6

Boldface type indicates hydraulically limited capacity; **lightface type** indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Machine equipped with 800-mm (32 in.) shoes; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.

| Load Point Height | 1.5 m (5 ft.) | | 3.0 m (10 ft.) | | 4.5 m (15 ft.) | | 6.0 m (20 ft.) | | 7.5 m (25 ft.) | | 9.0 m (30 ft.) | |
|--|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------|-----------------|-----------------|-----------------|----------------|
| Horizontal Distance from Centerline of Rotation | Over Front | Over Side | Over Front | Over Side | Over Front | Over Side | Over Front | Over Side | Over Front | Over Side | Over Front | Over Side |
| With 3.20-m (10 ft. 6 in.) arm, 6.4-m (21 ft. 0 in.) boom and 1273-kg (2,806 lb.) bucket | | | | | | | | | | | | |
| 6.0 m (20 ft.) | | | | | | | | | 7960 | 6440 | | |
| | | | | | | | | | (17,430) | (13,810) | | |
| 4.5 m (15 ft.) | | | | | | | 9960 | 9100 | 8610 | 6230 | | |
| | | | | | | | (21,550) | (19,600) | (18,740) | (13,370) | | |
| 3.0 m (10 ft.) | | | | | 16 250 | 13 410 | 11 680 | 8560 | 9480 | 5950 | 6360 | 4430 |
| | | | | | (34,880) | (28,920) | (25,230) | (18,440) | (20,580) | (12,800) | | |
| 1.5 m (5 ft.) | | | | | 18 820 | 12 520 | 13 160 | 8080 | 9520 | 5690 | 7190 | 4310 |
| | | | | | (40,590) | (26,970) | (28,450) | (17,410) | (20,460) | (12,240) | (15,430) | (9,230) |
| Ground Line | | | | | 19 600 | 12 150 | 13 390 | 7780 | 9310 | 5510 | 7050 | 4180 |
| | | | | | (42,440) | (26,120) | (28,750) | (16,750) | (20,020) | (11,840) | (15,150) | (8,970) |
| -1.5 m (-5 ft.) | | | 12 220 | 12 220 | 19 070 | 12 080 | 13 250 | 7660 | 9220 | 5430 | 6960 | 4100 |
| | | | (27,720) | (27,720) | (41,350) | (25,960) | (28,450) | (16,490) | (19,830) | (11,670) | (14,960) | (8,800) |
| -3.0 m (-10 ft.) | 14 530 | 14 530 | 19 970 | 19 970 | 17 430 | 12 210 | 13 030 | 7710 | 9290 | 5480 | | |
| | (32,600) | (32,600) | (45,330) | (45,330) | (37,730) | (26,230) | (28,110) | (16,590) | (20,000) | (11,820) | | |
| -4.5 m (-15 ft.) | | | 19 200 | 19 200 | 14 280 | 12 530 | 10 490 | 7950 | | | | |
| | | | (41,260) | (41,260) | (30,590) | (26,960) | (22,170) | (17,150) | | | | |
| With 4.0-m (13 ft. 1 in.) arm, 6.4-m (21 ft. 0 in.) boom and 1273-kg (2,806 lb.) bucket | | | | | | | | | | | | |
| 7.5 m (25 ft.) | | | | | | | | | (14,660) | (14,340) | | |
| 6.0 m (20 ft.) | | | | | | | | | 6,940 | 6580 | 5700 | 4600 |
| | | | | | | | | | (15,190) | (14,110) | (11,000) | (9,810) |
| 4.5 m (15 ft.) | | | | | | | | | 7700 | 6340 | 7140 | 4500 |
| | | | | | | | | | (16,760) | (13,600) | (15,550) | (9,620) |
| 3.0 m (10 ft.) | | | | | 14 170 | 13 920 | 10 530 | 8750 | 8700 | 6030 | 7230 | 4340 |
| | | | | | (30,440) | (30,010) | (22,750) | (18,840) | (18,870) | (12,950) | (15,510) | (9,290) |
| 1.5 m (5 ft.) | | | | | 17 420 | 12 800 | 12 280 | 8190 | 9560 | 5720 | 7040 | 4170 |
| | | | | | (37,540) | (27,580) | (26,550) | (17,630) | (20,550) | (12,290) | (15,120) | (8,930) |
| Ground Line | | | 6960 | 6960 | 19 120 | 12 170 | 13 410 | 7790 | 9290 | 5480 | 6900 | 4030 |
| | | | (15,920) | (15,920) | (41,350) | (26,180) | (28,800) | (16,750) | (19,970) | (11,770) | (14,810) | (8,650) |
| -1.5 m (-5 ft.) | 7010 | 7010 | 11 120 | 11 120 | 19 370 | 11 930 | 13 160 | 7570 | 9130 | 5330 | 6820 | 3960 |
| | (15,670) | (15,670) | (25,190) | (25,190) | (41,950) | (25,640) | (28,260) | (16,280) | (19,620) | (11,460) | (14,660) | (8,510) |
| -3.0 m (-10 ft.) | 11 610 | 11 610 | 16 550 | 16 550 | 18 430 | 11 950 | 13 110 | 7530 | 9100 | 5310 | | |
| | (26,040) | (26,040) | (37,530) | (37,530) | (39,880) | (25,670) | (28,150) | (16,190) | (19,580) | (11,420) | | |
| -4.5 m (-15 ft.) | 17 110 | 17 110 | 22 900 | 22 900 | 16 180 | 12 160 | 11 970 | 7660 | 8670 | 5450 | | |
| | (38,570) | (38,570) | (49,330) | (49,330) | (34,810) | (26,160) | (25,650) | (16,490) | (18,130) | (11,780) | | |
| -6.0 m (-20 ft.) | | | 16 290 | 16 290 | 11 790 | 11 790 | 7960 | 7960 | | | | |
| | | | (34,320) | (34,320) | (24,700) | (24,700) | | | | | | |

SPECS


Buckets

ZX350LC-6

A full line of buckets is offered to meet a wide variety of applications. Digging forces are with power boost. Buckets are equipped with ESCO teeth standard. Replaceable cutting edges and a variety of teeth are available through dealer parts. Optional side cutters add 150 mm (6 in.) to bucket widths. Capacities are SAE heaped ratings.

| Type Bucket | Bucket Width | | Bucket Capacity | | Bucket Weight | | Bucket Dig Force | | Arm Dig Force 2.67 m (8 ft. 9 in.) HD | | Arm Dig Force 3.2 m (10 ft. 6 in.) | | Arm Dig Force 4.0 m (13 ft. 1 in.) | | Bucket Tip Radius mm in. | Number of Teeth | |
|--|--------------|-----|-----------------|---------|---------------|-------|------------------|--------|--|--------|---------------------------------------|--------|---------------------------------------|--------|-----------------------------|--------------------|---|
| | mm | in. | m ³ | cu. yd. | kg | lb. | kN | lb. | kN | lb. | kN | lb. | kN | lb. | | | |
| General Purpose, High Capacity | 1524 | 60 | 2.13 | 2.78 | 1673 | 3,687 | 225.7 | 50,737 | 213.9 | 48,093 | 185.0 | 41,588 | 154.5 | 34,725 | 1811 | 71.31 | 7 |
| Heavy Duty Plate Lip | 914 | 36 | 0.99 | 1.30 | 1061 | 2,338 | 244.6 | 54,994 | 220.9 | 49,653 | 185.0 | 41,581 | 158.3 | 35,585 | 1671 | 65.79 | 4 |
| | 1067 | 42 | 1.22 | 1.59 | 1203 | 2,651 | 244.8 | 55,044 | 220.9 | 49,671 | 185.0 | 41,594 | 158.3 | 35,595 | 1670 | 65.73 | 5 |
| | 1219 | 48 | 1.44 | 1.88 | 1300 | 2,866 | 244.7 | 55,019 | 220.9 | 49,662 | 185.0 | 41,588 | 158.3 | 35,590 | 1670 | 65.76 | 6 |
| | 1372 | 54 | 1.67 | 2.18 | 1393 | 3,072 | 244.7 | 55,019 | 220.9 | 49,662 | 185.0 | 41,588 | 158.3 | 35,590 | 1673 | 65.86 | 6 |
| Heavy Duty Plate Lip, High Capacity | 1067 | 42 | 1.33 | 1.74 | 1370 | 3,020 | 225.5 | 50,687 | 213.8 | 48,074 | 179.7 | 40,401 | 154.4 | 34,715 | 1813 | 71.38 | 5 |
| | 1219 | 48 | 1.58 | 2.07 | 1507 | 3,323 | 225.5 | 50,687 | 213.8 | 48,074 | 179.7 | 40,401 | 154.4 | 34,715 | 1813 | 71.38 | 6 |
| | 1372 | 54 | 1.84 | 2.41 | 1618 | 3,568 | 225.3 | 50,652 | 213.8 | 48,060 | 179.7 | 40,391 | 154.4 | 34,707 | 1814 | 71.43 | 6 |

Bucket Selection Guide*

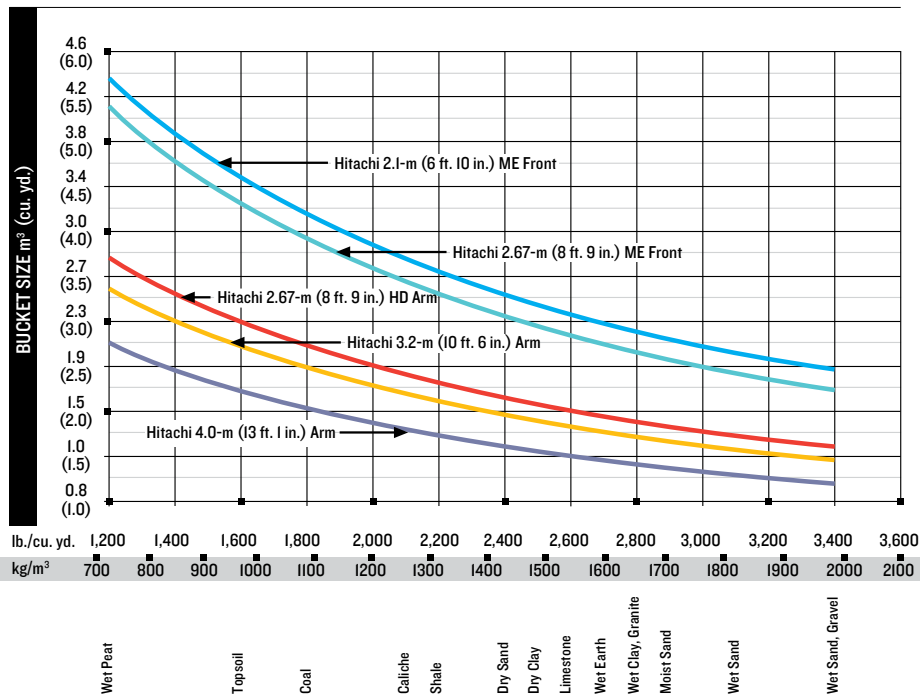

* Contact your Hitachi dealer for optimum bucket and attachment selections. These recommendations are for general conditions and average use. Does not include optional equipment such as thumbs or couplers. Larger buckets may be possible when using light materials, for flat and level operations, less compacted materials, and volume loading applications such as mass-excavation applications in ideal conditions. Smaller buckets are recommended for adverse conditions such as off-level applications, rocks, and uneven surfaces. Bucket capacity indicated is SAE heaped.

ZX380LC-6

| | | | |
|--|--|---------------------|--------------------|
| Engine | | ZX380LC-6 | |
| Manufacturer and Model | Isuzu 6HK1 | | |
| Non-Road Emission Standard | EPA Final Tier 4 / EU Stage IV | | |
| Net Rated Power (ISO 9249) | 202 kW (271 hp) at 1,900 rpm | | |
| Cylinders | 6 | | |
| Displacement | 7.8 L (475 cu. in.) | | |
| Off-Level Capacity | 70% (35 deg.) | | |
| Aspiration | Turbocharged, air-to-air charge-air cooler | | |
| Cooling | | | |
| High efficiency direct-driven, suction-type fan and cool-on-demand hydraulic-driven, suction-type fan with remote-mounted drive for hydraulic oil cooler | | | |
| Powertrain | | | |
| 2-speed propel with automatic shift | | | |
| Maximum Travel Speed | | | |
| Low | 3.2 km/h (2.0 mph) | | |
| High | 5.0 km/h (3.1 mph) | | |
| Drawbar Pull | 30 350 kg (66,900 lb.) | | |
| Hydraulics | | | |
| Open center, load sensing | | | |
| Main Pumps | | | |
| 2 variable-displacement pumps | | | |
| Maximum Rated Flow | 288 L/m (76.1 gpm) x 2 | | |
| System Operating Pressure | | | |
| Circuits | | | |
| Implement | 34 300 kPa (4,975 psi) | | |
| Travel | 35 500 kPa (5,149 psi) | | |
| Swing | 33 300 kPa (4,830 psi) | | |
| Power Boost | 38 000 kPa (5,511 psi) | | |
| Controls | Pilot levers, short-stroke, low-effort hydraulic pilot controls with shutoff lever | | |
| Cylinders | | | |
| | Bore | Rod Diameter | Stroke |
| Boom (2) | 145 mm (5.7 in.) | 100 mm (3.9 in.) | 1520 mm (59.8 in.) |
| Arm (1) | 170 mm (6.7 in.) | 115 mm (4.5 in.) | 1740 mm (68.5 in.) |
| Bucket (1) | 140 mm (5.5 in.) | 95 mm (3.7 in.) | 1250 mm (49.2 in.) |
| Electrical | | | |
| Number of Batteries (12 volt) | 2 | | |
| Battery Capacity | 1,000 CCA | | |
| Alternator Rating | 50 amp | | |
| Work Lights | 2 halogen (one mounted on boom, one on frame) | | |
| Undercarriage | | | |
| Rollers (each side) | | | |
| Carrier | 2 | | |
| Track | 8 | | |
| Shoes, Triple Semi-Grousers (each side) | 48 | | |
| Track | | | |
| Adjustment | Hydraulic | | |
| Guides | 3 per side | | |
| Chain | Sealed and lubricated | | |
| Ground Pressure | | | |
| 800-mm (32 in.) Triple Semi-Grouser Shoes | 52.5 kPa (7.61 psi) | | |
| Swing Mechanism | | | |
| Speed | 10.7 rpm | | |
| Torque | 120 000 Nm (88,500 lb.-ft.) | | |

SPECS

Serviceability ZX380LC-6

Refill Capacities

| | |
|---------------------------------|-------------------|
| Fuel Tank | 630 L (166 gal.) |
| Diesel Exhaust Fluid (DEF) Tank | 70 L (18 gal.) |
| Cooling System | 45 L (12 gal.) |
| Engine Oil with Filter | 48 L (13 gal.) |
| Hydraulic Tank | 180 L (48 gal.) |
| Hydraulic System | 340 L (90 gal.) |
| Swing Drive | 15.7 L (16.6 qt.) |
| Gearbox | |
| Propel (each) | 9.2 L (9.7 qt.) |
| Pump Drive | 1.1 L (1.2 qt.) |

Operating Weights

With full fuel tank; 79-kg (175 lb.) operator; 1.4-m³ (1.8 cu. yd.), 1370-mm (54 in.), 1160-kg (2,557 lb.) bucket; 4.0-m (13 ft. 1 in.) arm; 7900-kg (16,755 lb.) counterweight; and 800-mm (32 in.) heavy-duty (HD) triple semi-grouser shoes


Operating Weight 37 320 kg (82,276 lb.)

Component Weights


| | |
|---|------------------------|
| Undercarriage w/ HD Triple Semi-Grouser Shoes | |
| 800-mm (32 in.) | 13 550 kg (29,872 lb.) |
| One-Piece Boom (with arm cylinder) HD | 3541 kg (7,806 lb.) |
| Arm with Bucket Cylinder and Linkage | |
| 3.2 m (10 ft. 6 in.) HD | 1957 kg (4,315 lb.) |
| 4.0 m (13 ft. 1 in.) | 1898 kg (4,184 lb.) |
| Boom-Lift Cylinders (2) Total Weight | 624 kg (1,376 lb.) |

Operating Dimensions

| | | |
|----------------------|---|------------------------|
| Arm Length | 3.2 m (10 ft. 6 in.) HD | 4.0 m (13 ft. 1 in.) |
| Boom Length | 6.4 m (21 ft. 0 in.) | 6.4 m (21 ft. 0 in.) |
| Arm Digging Force | | |
| SAE | 177 kN (39,791 lb.) | 153 kN (34,396 lb.) |
| ISO | 185 kN (41,590 lb.) | 159 kN (35,745 lb.) |
| Bucket Digging Force | | |
| SAE | 214 kN (48,109 lb.) | 214 kN (48,109 lb.) |
| ISO | 246 kN (55,303 lb.) | 246 kN (55,303 lb.) |
| A | Maximum Reach | 11.10 m (36 ft. 5 in.) |
| A' | Maximum Reach at Ground Level | 10.89 m (35 ft. 9 in.) |
| B | Maximum Digging Depth | 7.38 m (24 ft. 3 in.) |
| B' | Maximum Digging Depth at 2.44-m (8 ft.) Flat Bottom | 7.21 m (23 ft. 8 in.) |
| C | Maximum Cutting Height | 10.36 m (34 ft. 0 in.) |
| D | Maximum Dumping Height | 7.24 m (23 ft. 9 in.) |
| E | Minimum Swing Radius | 4.46 m (14 ft. 8 in.) |
| F | Maximum Vertical Wall | 6.42 m (21 ft. 1 in.) |

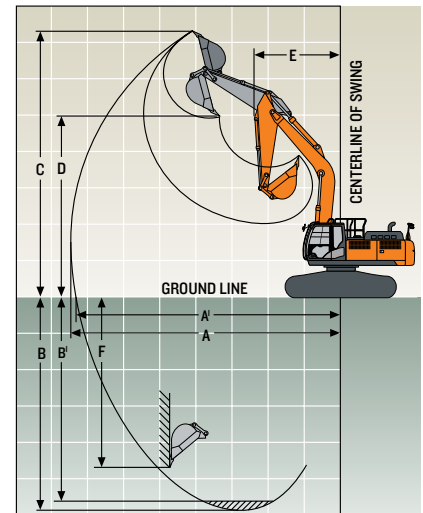

| Machine Dimensions | ZX380LC-6 |
|--|-----------------------------------|
| A Overall Length | |
| 3.2-m (10 ft. 6 in.) HD arm / 6.4-m (21 ft. 0 in.) HD boom | 11.20 m (36 ft. 9 in.) |
| 4.0-m (13 ft. 1 in.) arm / 6.4-m (21 ft. 0 in.) HD boom | 11.29 m (37 ft. 0 in.) |
| B Overall Height | |
| 3.2-m (10 ft. 6 in.) HD arm / 6.4-m (21 ft. 0 in.) HD boom | 3.27 m (10 ft. 9 in.) |
| 4.0-m (13 ft. 1 in.) arm / 6.4-m (21 ft. 0 in.) HD boom | 3.60 m (11 ft. 10 in.) |
| C Swing Radius | 3.60 m (11 ft. 10 in.) |
| D Distance Between Idler/Sprocket Centerline | 4.05 m (13 ft. 3 in.) |
| E Undercarriage Length | 4.94 m (16 ft. 2 in.) |
| F Counterweight Clearance | 1.18 m (3 ft. 10 in.) |
| G Upperstructure Width | 2.99 m (9 ft. 10 in.) |
| H Cab Height | 3.14 m (10 ft. 4 in.) |
| I Track Width with Triple Semi-Grouser Shoes | 700 mm (28 in.) / 800 mm (32 in.) |
| J Gauge Width | 2.59 m (8 ft. 6 in.) |
| K Ground Clearance | 0.51 m (20 in.) |
| L Overall Width with Triple Semi-Grouser Shoes | |
| 700 mm (28 in.) | 3.29 m (10 ft. 10 in.) |
| 800 mm (32 in.) | 3.39 m (11 ft. 2 in.) |

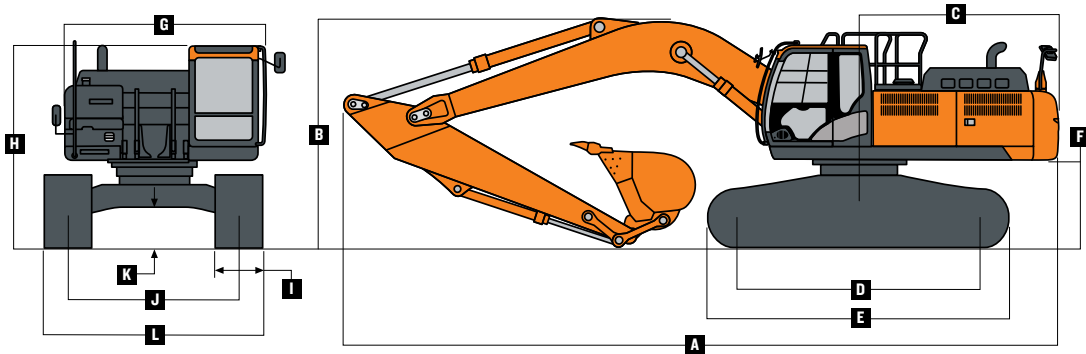

SPECS

Lift Charts ZX380LC-6

Boldface type indicates hydraulically limited capacity; **lightface type** indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Machine equipped with 1273-kg (2,806 lb.) bucket and 800-mm (32 in.) HD shoes; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.

| Load Point Height | 1.5 m (5 ft.) | | 3.0 m (10 ft.) | | 4.5 m (15 ft.) | | 6.0 m (20 ft.) | | 7.5 m (25 ft.) | | 9.0 m (30 ft.) | |
|--|---------------|-----------|----------------|-----------|----------------|-----------|----------------|-------------|----------------|-------------|----------------|-----------|
| Horizontal Distance from Centerline of Rotation | Over Front | Over Side | Over Front | Over Side | Over Front | Over Side | Over Front | Over Side | Over Front | Over Side | Over Front | Over Side |
| With 3.20-m (10 ft. 6 in.) HD arm and 6.4-m (21 ft. 0 in.) HD boom | | | | | | | | | | | | |
| 6.0 m (20 ft.) | | | | | | | | | 7780 | 6940 | | |
| | | | | | | | | | (17,040) | (14,890) | | |
| 4.5 m (15 ft.) | | | | | | | 9760 | 9760 | 8410 | 6710 | 6310 | 4780 |
| | | | | | | | (21,110) | (21,090) | (18,310) | (14,410) | | |
| 3.0 m (10 ft.) | | | | | 15 930 | 14 370 | 11 430 | 9190 | 9260 | 6410 | 7730 | 4650 |
| | | | | | (34,200) | (31,010) | (24,690) | (19,810) | (20,100) | (13,780) | (16,580) | (9,970) |
| 1.5 m (5 ft.) | | | | | 18 430 | 13 400 | 12 870 | 8670 | 10 060 | 6120 | 7570 | 4510 |
| | | | | | (39,750) | (28,870) | (27,820) | (18,680) | (21,790) | (13,170) | (16,270) | (9,680) |
| Ground Line | | | | | 19 190 | 12 990 | 13 670 | 8350 | 9980 | 5920 | 7470 | 4420 |
| | | | | | (41,540) | (27,940) | (29,590) | (17,960) | (21,460) | (12,730) | (16,070) | (9,490) |
| -1.5 m (-5 ft.) | | | 12 170 | 12 170 | 18 650 | 12 920 | 13 670 | 8220 | 9890 | 5830 | | |
| | | | (27,630) | (27,630) | (40,440) | (27,770) | (29,590) | (17,680) | (21,260) | (12,550) | | |
| -3.0 m (-10 ft.) | 14 490 | 14 490 | 19 930 | 19 930 | 17 030 | 13 070 | 12 710 | 8270 | 9510 | 5900 | | |
| | (32,500) | (32,500) | (45,250) | (45,250) | (36,840) | (28,080) | (27,420) | (17,790) | (20,290) | (12,720) | | |
| -4.5 m (-15 ft.) | | | 18 680 | 18 680 | 13 900 | 13 420 | 10 190 | 8530 | | | | |
| | | | (40,140) | (40,140) | (29,780) | (28,890) | (21,530) | (18,420) | | | | |
| With 4.0-m (13 ft. 1 in.) arm and 6.4-m (21 ft. 0 in.) HD boom | | | | | | | | | | | | |
| 7.5 m (25 ft.) | | | | | | | | | (14,580) | (14,580) | | |
| 6.0 m (20 ft.) | | | | | | | | | 6900 | 6900 | 5700 | 5080 |
| | | | | | | | | | (15,110) | (15,110) | (11,000) | (10,830) |
| 4.5 m (15 ft.) | | | | | | | | | 7650 | 6940 | 7090 | 4970 |
| | | | | | | | | | (16,660) | (14,910) | (15,510) | (10,640) |
| 3.0 m (10 ft.) | | | | | 14 100 | 14 100 | 10 470 | 9540 | 8640 | 6620 | 7580 | 4800 |
| | | | | | (30,280) | (30,280) | (22,620) | (20,560) | (18,740) | (14,230) | (16,520) | (10,290) |
| 1.5 m (5 ft.) | | | | | 17 290 | 13 940 | 12 190 | 8960 | 9610 | 6300 | 7690 | 4620 |
| | | | | | (37,280) | (30,030) | (26,360) | (19,290) | (20,840) | (13,540) | (16,520) | (9,920) |
| Ground Line | | | 6960 | 6960 | 18 970 | 13 280 | 13 390 | 8540 | 10 110 | 6040 | 7530 | 4480 |
| | | | (15,920) | (15,920) | (41,020) | (28,550) | (28,960) | (18,370) | (21,730) | (12,980) | (16,190) | (9,620) |
| -1.5 m (-5 ft.) | 7010 | 7010 | 11 120 | 11 120 | 19 210 | 13 020 | 13 830 | 8310 | 9940 | 5890 | 7450 | 4410 |
| | (15,670) | (15,670) | (25,190) | (25,190) | (41,600) | (27,990) | (29,930) | (17,870) | (21,370) | (12,660) | (16,030) | (9,470) |
| -3.0 m (-10 ft.) | 11 610 | 11 610 | 16 550 | 16 550 | 18 260 | 13 030 | 13 410 | 8260 | 9910 | 5860 | | |
| | (26,040) | (26,040) | (37,530) | (37,530) | (39,520) | (28,010) | (28,980) | (17,770) | (21,310) | (12,610) | | |
| -4.5 m (-15 ft.) | 17 110 | 17 110 | 22 660 | 22 660 | 16 010 | 13 250 | 11 850 | 8390 | 8570 | 6000 | | |
| | (38,570) | (38,570) | (48,820) | (48,820) | (34,460) | (28,510) | (25,390) | (18,080) | (17,930) | (12,980) | | |
| -6.0 m (-20 ft.) | | | 16 080 | 16 080 | 11 640 | 11 640 | 7850 | 7850 | | | | |
| | | | (33,860) | (33,860) | (24,390) | (24,390) | | | | | | |


Buckets

ZX380LC-6

A full line of buckets is offered to meet a wide variety of applications. Digging forces are with power boost. Buckets are equipped with ESCO teeth standard. Replaceable cutting edges and a variety of teeth are available through dealer parts. Optional side cutters add 150 mm (6 in.) to bucket widths. Capacities are SAE heaped ratings.

| Type Bucket | Bucket Width | | Bucket Capacity | | Bucket Weight | | Bucket Dig Force | | Arm Dig Force 2.67 m (8 ft. 9 in.) | | Arm Dig Force 3.2 m (10 ft. 6 in.) | | Arm Dig Force 4.0 m (13 ft. 1 in.) | | Bucket Tip Radius | | Number of Teeth |
|--|--------------|-----|-----------------|---------|---------------|-------|------------------|--------|---------------------------------------|--------|---------------------------------------|--------|---------------------------------------|--------|-------------------|-------|-----------------|
| | mm | in. | m ³ | cu. yd. | kg | lb. | kN | lb. | kN | lb. | kN | lb. | kN | lb. | mm | in. | |
| General Purpose, High Capacity | 1524 | 60 | 2.13 | 2.78 | 1673 | 3,687 | 225.7 | 50,737 | 213.9 | 48,093 | 185.0 | 41,588 | 154.5 | 34,725 | 1811 | 71.31 | 7 |
| Heavy Duty Plate Lip | 914 | 36 | 0.99 | 1.30 | 1061 | 2,338 | 244.6 | 54,994 | 220.9 | 49,653 | 185.0 | 41,581 | 158.3 | 35,585 | 1671 | 65.79 | 4 |
| | 1067 | 42 | 1.22 | 1.59 | 1203 | 2,651 | 244.8 | 55,044 | 220.9 | 49,671 | 185.0 | 41,594 | 158.3 | 35,595 | 1670 | 65.73 | 5 |
| | 1219 | 48 | 1.44 | 1.88 | 1300 | 2,866 | 244.7 | 55,019 | 220.9 | 49,662 | 185.0 | 41,588 | 158.3 | 35,590 | 1670 | 65.76 | 6 |
| | 1372 | 54 | 1.67 | 2.18 | 1393 | 3,072 | 244.7 | 55,019 | 220.9 | 49,662 | 185.0 | 41,588 | 158.3 | 35,590 | 1673 | 65.86 | 6 |
| Heavy Duty Plate Lip, High Capacity | 1067 | 42 | 1.33 | 1.74 | 1370 | 3,020 | 225.5 | 50,687 | 213.8 | 48,074 | 179.7 | 40,401 | 154.4 | 34,715 | 1813 | 71.38 | 5 |
| | 1219 | 48 | 1.58 | 2.07 | 1507 | 3,323 | 225.5 | 50,687 | 213.8 | 48,074 | 179.7 | 40,401 | 154.4 | 34,715 | 1813 | 71.38 | 6 |
| | 1372 | 54 | 1.84 | 2.41 | 1618 | 3,568 | 225.3 | 50,652 | 213.8 | 48,060 | 179.7 | 40,391 | 154.4 | 34,707 | 1814 | 71.43 | 6 |

Bucket Selection Guide*

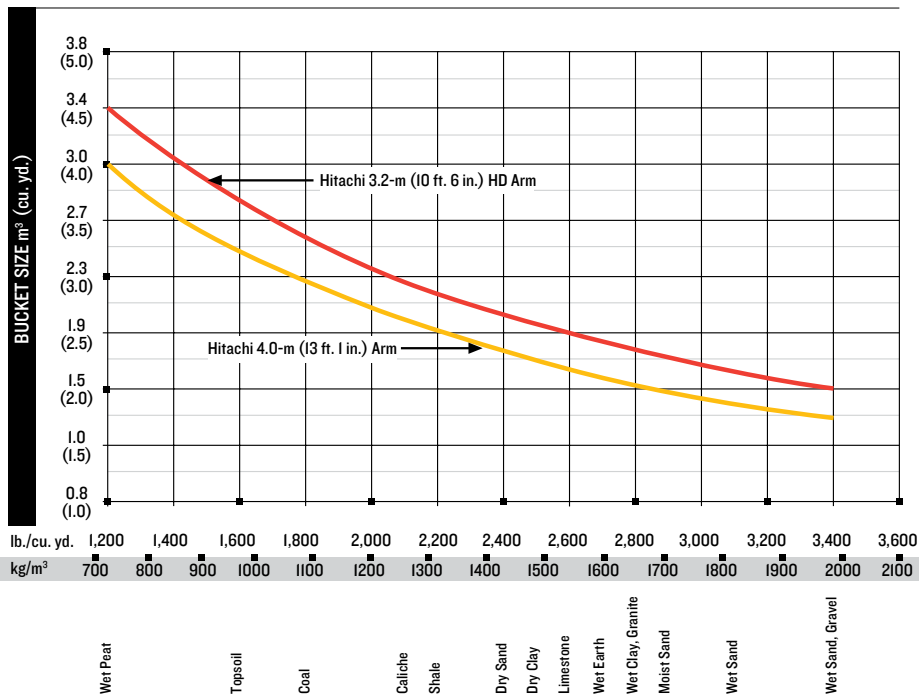

*Contact your Hitachi dealer for optimum bucket and attachment selections. These recommendations are for general conditions and average use. Does not include optional equipment such as thumbs or couplers. Larger buckets may be possible when using light materials, for flat and level operations, less compacted materials, and volume loading applications such as mass-excavation applications in ideal conditions. Smaller buckets are recommended for adverse conditions such as off-level applications, rocks, and uneven surfaces. Bucket capacity indicated is SAE heaped.

SPECS

ADDITIONAL EQUIPMENT

Key: ● Standard ▲ Optional or special kit

| 350 | 380 | Engine |
|-----|-----|---|
| ● | ● | Auto-idle system |
| ● | ● | Batteries (2 - 12 volt) |
| ● | ● | Coolant recovery tank |
| ● | ● | Dual-element dry-type air filter |
| ● | ● | Electronic engine control |
| ● | ● | Enclosed fan guard (conforms to SAE J1308) |
| ● | ● | Engine coolant to -37 deg. C (-34 deg. F) |
| ● | ● | Programmable auto shutdown |
| ● | ● | Fuel filter with water separator |
| ● | ● | Full-flow oil filter |
| ● | ● | Turbocharger with charge air cooler |
| ● | ● | High-efficiency, low-noise fan |
| ● | ● | 500-hour engine-oil-change interval |
| ● | ● | 70% (35 deg.) off-level capability |
| ● | ● | Severe-duty fuel filter |
| ▲ | ▲ | Chrome exhaust stack |
| | | Hydraulic System |
| ● | ● | Reduced-drift valve for boom down, arm in |
| ● | ● | Auxiliary hydraulic valve section |
| ● | ● | Spring-applied, hydraulically released automatic swing brake |
| ● | ● | Auxiliary hydraulic-flow adjustments through monitor |
| ● | ● | Auto power lift |
| ● | ● | 5,000-hour hydraulic-oil-change interval |
| ▲ | ▲ | Auxiliary hydraulic lines |
| ▲ | ▲ | Auxiliary pilot and electric controls |
| ▲ | ▲ | Hydraulic filter restriction indicator kit |
| ▲ | ▲ | Load-lowering control / Anti-drift device |
| ▲ | ▲ | Single-pedal propel control |
| ▲ | ▲ | Control pattern change valve |
| | | Undercarriage |
| ● | ● | Planetary drive with axial piston motors |
| ● | ● | Propel motor shields |
| ● | ● | Spring-applied, hydraulically released automatic propel brake |
| ● | ● | Track guides, front idler and 3 additional |
| ● | ● | 2-speed propel with automatic shift |
| ● | ● | Upper carrier rollers (2) |
| ● | ● | Sealed and lubricated track chain |
| ● | ● | Triple semi-grouser shoes, 600 mm (24 in.) |
| ● | ● | Triple semi-grouser shoes, 700 mm (28 in.) |
| ● | ● | Single-bar shoes, 700 mm (28 in.) Heavy Duty (HD) |
| ● | ● | Triple semi-grouser shoes, 800 mm (32 in.) |
| ● | ● | Triple semi-grouser shoes, 800 mm (32 in.) HD |
| ▲ | ▲ | Undercarriage frame opening guard |

| 350 | 380 | Upperstructure |
|-----|-----|---|
| ● | ● | Right-hand, left-hand, and counterweight mirrors |
| ● | ● | Vandal locks with ignition key: Cab door / Service doors / Toolbox |
| ● | ● | Debris screen |
| ● | ● | Remote-mounted engine oil and fuel filters |
| | | Front Attachments |
| ● | ● | Centralized lubrication system |
| ● | ● | Dirt seals on all bucket pins |
| ● | ● | Less boom and arm |
| ● | ● | Oil-impregnated bushings |
| ● | ● | Reinforced resin thrust plates |
| ● | ● | Tungsten carbide thermal coating on arm-to-bucket joint |
| ▲ | ▲ | Arm, 2.66 m (8 ft. 9 in.) |
| ▲ | ▲ | Arm, 3.2 m (10 ft. 6 in.) |
| ▲ | ▲ | Arm, 3.2 m (10 ft. 6 in.) HD |
| ▲ | ▲ | Arm, 4.0 m (13 ft. 1 in.) |
| ▲ | ▲ | Attachment quick-couplers |
| ▲ | ▲ | Boom cylinder with plumbing to mainframe less boom and arm |
| ▲ | ▲ | Buckets: Heavy duty / Heavy-duty high capacity / Side cutters and teeth |
| ▲ | ▲ | "D" channel guard |
| ▲ | ▲ | Material clamps |
| ▲ | ▲ | Super-long fronts |
| | | Operator's Station |
| ● | ● | Adjustable independent-control positions (levers-to-seat, seat-to-pedals) |
| ● | ● | AM/FM radio |
| ● | ● | Auto climate control/air conditioner/heater/pressurizer |
| ● | ● | Built-in Operator's Manual storage compartment and manual |
| ● | ● | Cell-phone power outlet, 12 volt, 60 watt, 5 amp |
| ● | ● | Coat hook |
| ● | ● | Deluxe suspension cloth seat with 100-mm (4 in.) adjustable armrests |
| ● | ● | Floor mat |
| ● | ● | Front windshield wiper with intermittent speeds |
| ● | ● | Gauges (illuminated): Diesel Exhaust Fluid (DEF) / Engine coolant / Fuel |
| ● | ● | Horn, electric |
| ● | ● | Hour meter, electric |
| ● | ● | Hydraulic shutoff lever, all controls |
| ● | ● | Hydraulic warm-up control |
| ● | ● | Interior light |

| 350 | 380 | Operator's Station (continued) |
|-----|-----|---|
| ● | ● | Large cup holder |
| ● | ● | Machine Information Center (MIC) |
| ● | ● | Mode selectors (illuminated): Power modes (3) / Travel modes (2 with automatic shift) / Work mode (1) |
| ● | ● | Multifunction, color LCD monitor with: Diagnostic capability / Multiple-language capabilities / Maintenance tracking / Clock / System monitoring with alarm features: Auto-idle indicator, engine air cleaner restriction indicator light, engine check, engine coolant temperature indicator light with audible alarm, engine oil pressure indicator light with audible alarm, low-alternator-charge indicator light, low-fuel indicator light, low DEF indication with audible alarm, fault code alert indicator, fuel-rate display, wipermode indicator, work-lights-on indicator, and work-mode indicator |
| ● | ● | Motion alarm with cancel switch (conforms to SAE J994) |
| ● | ● | Power-boost switch on right console lever |
| ● | ● | Auxiliary hydraulic control switches in right console lever |
| ● | ● | SAE 2-lever control pattern |
| ● | ● | Seat belt, 51 mm (2 in.), retractable |
| ● | ● | Tinted glass |
| ● | ● | Transparent tinted overhead hatch |
| ● | ● | Hot/cold beverage compartment |
| ▲ | ▲ | Air-suspension heated seat |
| ▲ | ▲ | Hydraulic oil filter restriction indicator light |
| ▲ | ▲ | Protection screens for cab front, rear, and side |
| ▲ | ▲ | Seat belt, 76 mm (3 in.), non-retractable |
| ▲ | ▲ | Window vandal-protection covers |
| | | Electrical |
| ● | ● | 50-amp alternator |
| ● | ● | Battery disconnect switch |
| ● | ● | Blade-type multi-fused circuits |
| ● | ● | Positive-terminal battery covers |
| ● | ● | ZXLink™ wireless communication system (available in specific countries; see your dealer for details) |
| ▲ | ▲ | Rearview camera |
| ▲ | ▲ | Cab extension wiring harness |
| | | Lights |
| ● | ● | Work lights: Halogen / One mounted on boom / One mounted on frame |
| ▲ | ▲ | 2 lights mounted on cab / One mounted on right side of boom |

See your Hitachi dealer for further information.

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan, at test conditions specified per ISO 9249. No derating is required up to 3050-m (10,000 ft.) altitude. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on units with 1370-mm (54 in.) buckets, full fuel tanks, and 79-k (175 lb.) operators; a ZX350LC-6 unit with 6900-kg (15,212 lb.) counterweight and 800-mm (32 in.) triple semi-grouser shoes; and a ZX380LC-6 unit with 7900-kg (16,755 lb.) counterweight and 800-mm (32 in.) heavy-duty triple semi-grouser shoes.

HITACHI

hitachiconstruction.com